


Westfield Select IP67 D-Sub Male Front Panel Mount Straight PCB Mount Type

IP67 D-Sub Male Front Panel Mounting - Straight PCB Mount Type

- Machined / Turned Pin
- Plating: Gold Flash
- Other Options Available
- Locking via 440unc Screws

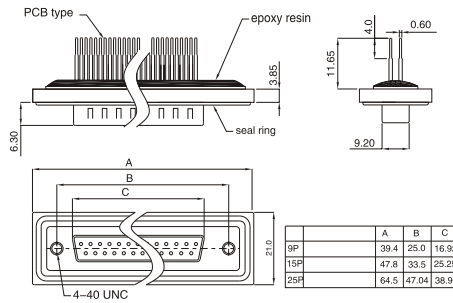

■ General information

Ambient temperature:	-25 °C ~ +70 °C
Connector insert:	PBT+GF
Connector contacts:	Brass gold plated
Coupling nut/screw:	Brass nickel plated
Seal / O-ring:	FKM

Insulation resistance:	≥ 1000MΩ
Forward resistance :	≤ 10mΩ
Shielding:	Unavailable
IP rating:	IP 67 in locked condition

Part Numbers

- 9way = IP67DSUBMSFPM-SPCBMT
- 15way = IP67DSUBMSFPM-SPCBMT
- 25way = IP67DSUBMSFPM-SPCBMT

■ Electrical data & Mechanical data

Contacts	Contacts	Rated current	Voltage	
			A/C	D/C
D-Sub 9P	PCB version	5A	300V	300V
D-Sub 15P	PCB version	5A	300V	300V
D-Sub 25P	PCB version	5A	300V	300V

■ Remarks

For other Gold Plating Options / Mating Cycles Please Contact Sales Office
Competitors Cross Reference Service Available